



PRO SERIES

FIBER ALL PLUS

Pretreat & Concentrated Extraction Cleaner

Now formulated to meet the stringent Carpet & Rug Institute's Seal of Approval for overall cleaning effectiveness, rate of resoiling, pH, surface texture change, and colorfastness. This more environmentally responsible, anti-soil, multi-purpose carpet cleaner concentrate is a pre-spray and extraction cleaner. Powerful, cleaning agents penetrate and lift soils. SSS Fiber All Plus is non-toxic, non-corrosive, contains no butyl, EDTA, phosphates, optical brighteners or volatile organic compounds (VOCs) as defined by state and Federal regulations. Formulated with Pleascent Scent fragrance.

Non-Corrosive - Biodegradable - Non-Toxic

Directions

Vacuum carpet thoroughly. Pre-test carpet for colorfastness in an out-of-sight area.

Extraction Method:

For moderate soil: dilute 2 oz. per gallon with cold water

For heavy soil: dilution 4 oz. per gallon with cold water


1. With a carpet extraction machine, extract with SSS Fiber All diluted properly
2. Allow carpet to dry. Accelerate drying with air-moving units as needed. Vacuum carpet thoroughly.

Prespray and Extraction Method - For Best Results:

For moderate soil: dilute 3 oz. per gallon

For heavy soil: dilution 8 oz. per gallon

(directions continued on second page)

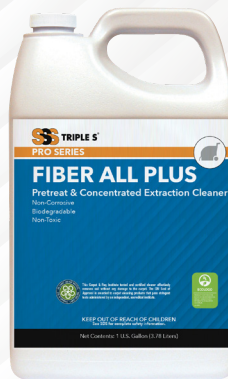

Specs

Dilution: 1:16 - 1:64

pH Level: 9.5 - 10.5

Color: Water Clear

Fragrance: Pleascent Scent

Pack: 4/1 Gallon (#48070)

Pleasant Scent Fragrance provides a single uniform fragrance throughout your facility for consistent odor management.



PRO SERIES

1. Prespray - apply SSS Fiber All through a pump-up or pressure sprayer applicator in the areas to be cleaned and allow a dwell time of 5-10 minutes. 500-600 square feet per diluted gallon is recommended coverage. Do not allow carpet to dry.
2. Extract with SSS Carpet Rinse Plus diluted at 1 oz. per gallon.
3. Allow carpet to dry. Accelerate drying with air-moving units as needed. Vacuum carpet thoroughly.

Truckmount Method:

1. Stock Solution: mix 32 oz. product to 5 gallons of water.
2. Meter at 3 gallons per hour.
3. Fresh water tanks: mix ½ oz. product per gallon of water.

Important Notes: Follow the cleaning procedures specified by manufacturer of the cleaning equipment. Avoid overwetting the carpet. Add SSS Liquid Defoamer to the recovery tank as necessary. After using this product, set the carpet pile and protect the carpet from furniture legs and bases while drying.

"Asthmatics" and other "chemically sensitive" individuals should avoid recently cleaned areas for a period of at least 24 hours. All carpet cleaning products introduce substances to the indoor environment; however, certified products have comparatively reduced risk.